


Pop-Up JR - Hook & Go System

PUJR4

JUST HOOK & GO!

Engineered for efficiency of transport, ease of deployment, and simplicity of use, the Hook & Go System powered by OMJC can be easily transported and deployed by a single person. The controller allows for 2, 3 or 4 phase operations with easily adjustable times. The signal heads are standard 12" RYG LED's. When fully deployed, each JR reaches a height of 12' for max visibility. In their travel position, the JR's retract to a compact 6' to reduce wind resistance when towed with our compact and rugged trailering system. The Hook & Go System was specifically designed to be the simplest solution for fully automated single lane closures. However, there are many other applications for the Hook & Go System to quickly and temporarily assist in managing traffic volume.

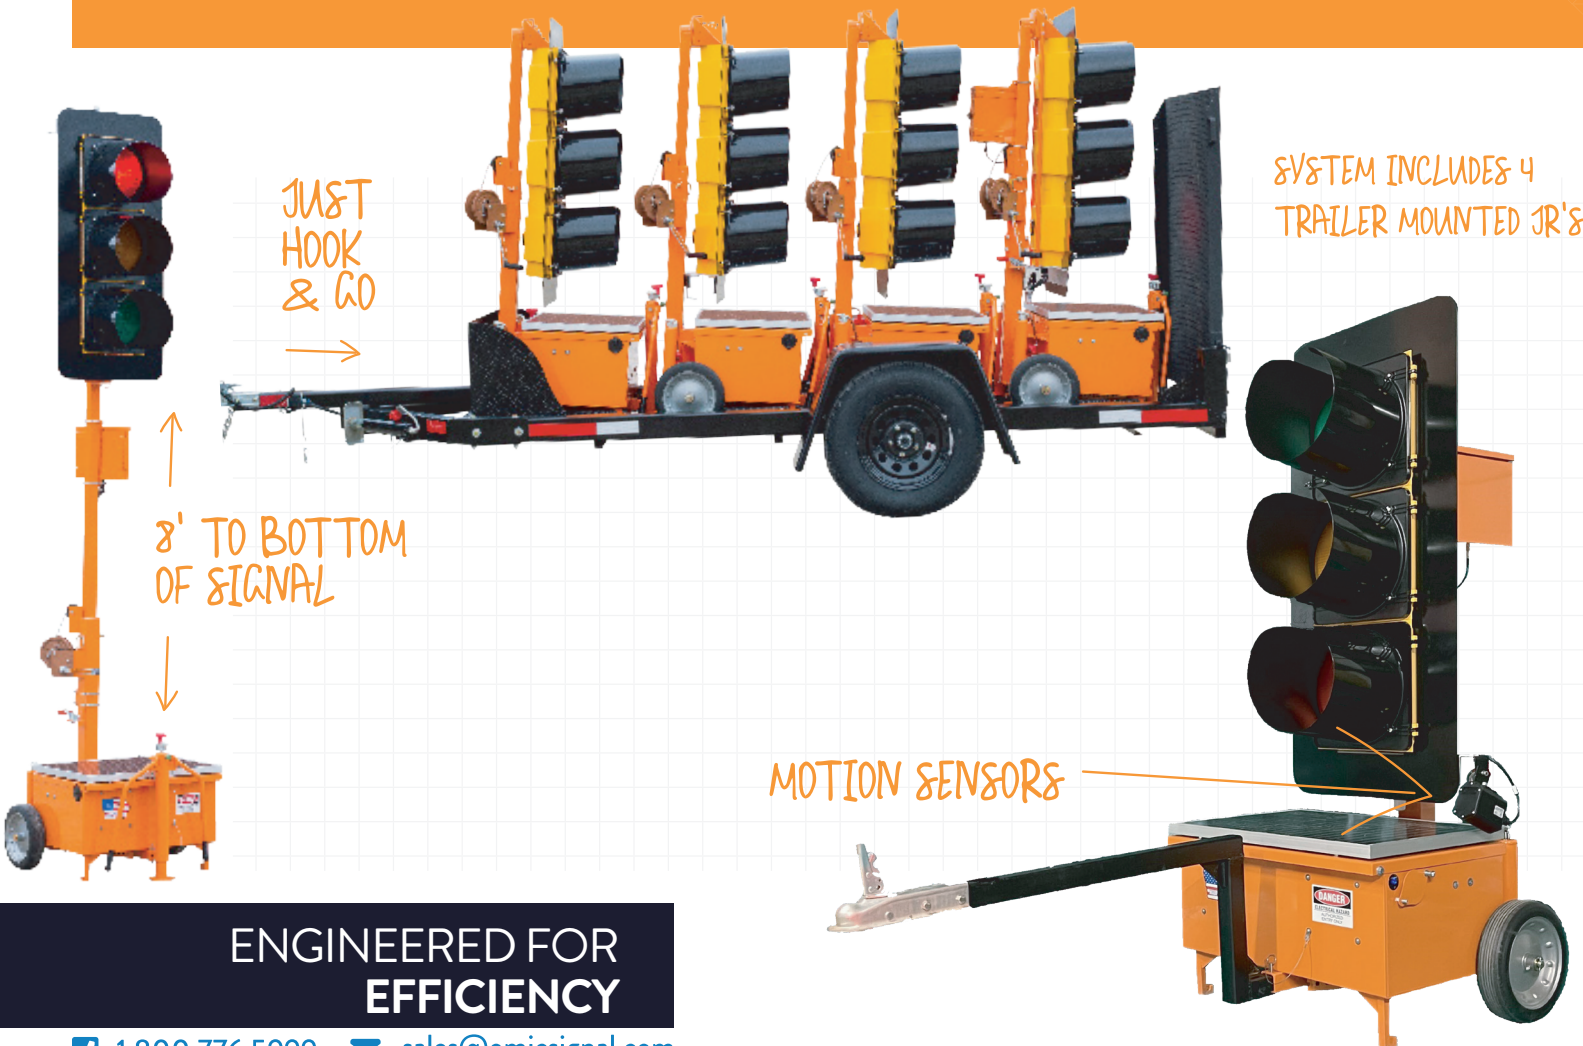

**ENGINEERED FOR
EFFICIENCY**

Pop-Up JR - Hook & Go System

QUICK, EASY & EFFICIENT

Pop-Up JR - Hook & Go • STANDARD FEATURES

DEPLOYMENT

Manual winch

SIGNAL HEAD CONFIGURATIONS

1 - 12" 3 Section (Solid red, yellow, green)

TRAFFIC CONTROL EQUIPMENT

Proprietary OMJC Controller, encrypted wireless connection

CHARGING SOURCE

DC | MPPT Solar Charge Controller

AC | 120V plug-in charger

Pop-Up JR - Hook & Go • SPECIFICATIONS

TRAVEL SIZE 30" L x 35.5" W x 72" H

DEPLOYED SIZE 56" L x 37" W x 141.5" H

STANDARD WEIGHT <400 lbs.

BATTERIES 110 Ah of AGM batteries, no-spill, no-maintenance

SOLAR 1-60 watt solar panel

TRANSPORTATION TRAILER SPECIFICATIONS

TRAVEL SIZE 186" L x 70 5/8" W x 86" H

TRAVEL SIZE 186" L x 70 5/8" W x 76" H

STANDARD WEIGHT <2,500 lbs.

STANDARD WEIGHT <1,200 lbs.

AXEL CAPACITY 3,500 lbs.

TIRES Maximum capacity 2,040 lbs. each

DECK HEIGHT 13"

RAMP LENGTH 60"

HITCH Pintle

OTHER INFORMATION Breakaway system

Electronic brakes

Adjustable hitch



☎ 1.800.776.5999 ✉ sales@omjcsignal.com
🌐 omjcsignal.com 🏠 403 Chestnut Street, Waterloo, IA 50703

